


L-CPA SERIES

RECESSED ACCESS PANEL FOR ACOUSTICAL TILE

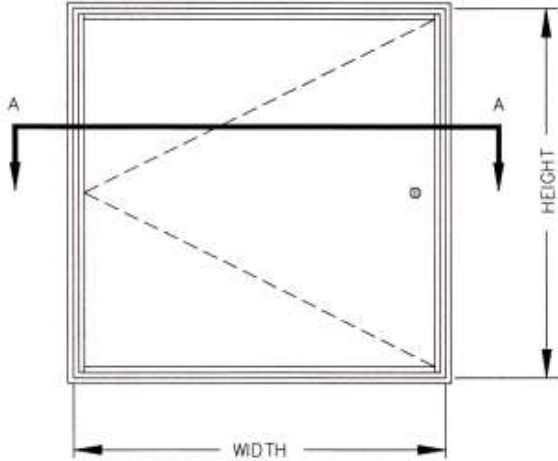


FRONT ELEVATION
NOT TO SCALE

SPECIFICATIONS

- 16 GAUGE (1.520mm) COLD ROLLED STEEL FRAME
- 16 GAUGE (1.520mm) COLD ROLLED STEEL DOOR
- PHOSPHATE DIPPED WITH BAKED ON RUST INHIBITIVE WHITE PRIME FINISH
- CONCEALED PIVOT ROD HINGE
- FLUSH SCREWDRIVER OPERATED CAM LATCH WITH PLASTIC GROMMET
- FRAMES ARE PROVIDED WITH .25" MOUNTING HOLES

OPTIONS

- q GALVANIZED BONDERIZED STEEL
- q KEY OPERATED CYLINDER LOCK, ONE PER PANEL
- q PREPARATION FOR 1.125" MORTISE CYLINDER (CYLINDER PROVIDED BY OTHERS OR BY LARSEN'S)

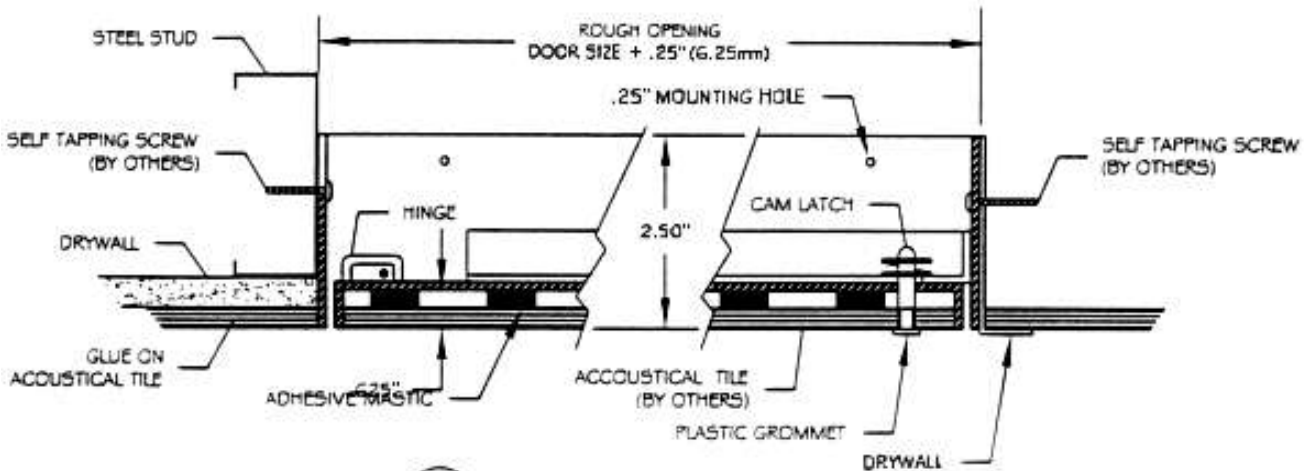

A CUT-THRU SECTION
A NOT TO SCALE

LARSEN'S MANUFACTURING CO.

7421 COMMERCE LANE
MINNEAPOLIS, MN 55432
PHONE: 800-527-7367
FAX: 763-571-6900
www.larsensmfg.com

PROJECT:

CONTRACTOR:

ARCHITECT:

DRAWN BY:

CMR

DATE:

9-1-01

QUANTITY:

TITLE:

L-CPA.DWG



L-CPA - RECESSED ACCESS PANEL FOR ACOUSTICAL TILE APPLICATIONS

L-CPA Standard Features:

- Door: 16 gauge (1.52 mm thick) cold rolled steel
- Frame 16 gauge (1.52 mm thick) cold rolled steel
- Hinge: Concealed pivoting rod hinge
- Latch: Screwdriver cam latch(es)
Optional: key operated cylinder lock or special mortise cylinder preparation to accept 2" cylinder (cylinder provided by Larsens or others)
- Finish: Phosphate dipped with factory applied white prime coat
- Pan: 5/8" pan for in-fill of material

L-CPA Specifications:

Model L-CPA recessed access panel for acoustical tile applications. Access panel shall be model L-CPA, size _____ as manufactured by **Larsens Mfg.** of Minneapolis, MN.

Frame shall be 16 gauge cold rolled steel. Door shall be fabricated from 16 gauge cold rolled steel, recessed 5/8" for in-fill of material. Hinge shall be a concealed pivoting rod type. Latch(es) shall be a screwdriver operated cam type (optional: key operated cylinder lock or prepared to receive special 2" mortise cylinder - cylinder provided by Larsens or others). Finish shall be phosphate dipped with factory applied white prime coat.

Installation shall be in accordance with manufacturer's instructions. Manufacturer shall guarantee against defects in material and workmanship for a period of one year.

L-CPA Standard Sizes:

<i>Std sizes (in)</i>	<i>Std Sizes (mm)</i>	<i>Weight/Latches</i>
08x08	152x152	7/1
12x12	254x254	8/1
12x24	305x610	11/2
16x16	406x406	11/1
18x18	457x457	13/2
22x30	559x762	25/2
24x24	610x610	22/2
24x36	610x914	32/3

All units are hinged on the second dimension (height). Rough opening is door size plus 1/4".

Larsens Manufacturing Company 7421 Commerce Lane Minneapolis, MN 55432
 Ph: 800-527-7367 Fax: 763-571-6900
 Web : www.larsensmfg.com