



# Larsen's® Fire Extinguishers — MP, DC & HT Series

## Submittal and Detail Sheet

PROJECT: \_\_\_\_\_  
 MODEL NUMBER: \_\_\_\_\_  
 ARCHITECT: \_\_\_\_\_  
 DATE: \_\_\_\_\_

LOCATION: \_\_\_\_\_  
 QUANTITY: \_\_\_\_\_  
 CONTRACTOR: \_\_\_\_\_  
 DISTRIBUTOR: \_\_\_\_\_

### MP SERIES-Multi-Purpose Dry Chemical

These units contain specially fluidized and siliconized mono ammonium phosphate powder which smothers and breaks the chain reaction on Class B fires, fuses and insulates Class A fires, and, as a non-conductor of electricity, is effective on Class C fires.


### DC SERIES-Regular Dry Chemical

These units contain specially siliconized sodium bicarbonate powder with free flowing and non-caking additives, suitable for fires in flammable liquids, and energized electrical equipment.

All multi-purpose and regular dry chemical units feature: Heavy DOT steel cylinders \* Rugged metal valves and siphon tubes \* Replaceable molded valve stem seals \* Pull pin-upright squeeze grip operation \* Approved to -65 degrees F. \* Non-toxic \* Pressure gauges\*

### HT SERIES-Halotron I


Halotron I is an EPA approved clean agent which discharges as a rapidly evaporating liquid, leaving no residue. It effectively extinguishes Class A, B and C fires and is intended for use in areas formerly protected by Halon 1211.

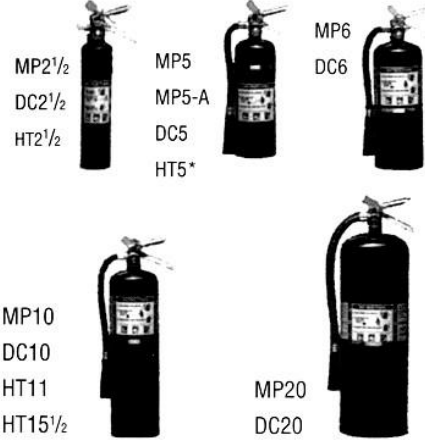


**\*Note:** HT5 is equipped with nozzle in lieu of hose and horn.

MODEL NUMBER	NOMINAL CAPACITY	SHIPPING WEIGHT	CYLINDER DIAMETER	OVERALL HEIGHT	OVERALL WIDTH	UL RATING	STANDARD BRACKET*	OPTIONAL BRACKET**
MP2½	2½ lbs.	5½ lbs.	3 in.	15½ in.	5¾ in.	1A-10B:C	817	860
MP5	5 lbs.	9¼ lbs.	4¼ in.	15¼ in.	7¼ in.	2A-10B:C	16591	B-2, 818, 821, 862
MP5-A	5 lbs.	9¼ lbs.	4¼ in.	15¼ in.	7¼ in.	3A40B:C	16591	818, 821, 862
MP6	6 lbs.	12¾ lbs.	5 in.	16 in.	7¾ in.	3A-40B:C	5525	808, 862
MP10	10 lbs.	18 lbs.	5 in.	20 in.	7¾ in.	4A-80B:C	546	B-2, 846, 862
MP20	20 lbs.	38 lbs.	7 in.	23¼ in.	10¼ in.	10A-120B:C	577	864
DC2½	2½ lbs.	5½ lbs.	3 in.	15½ in.	5-3/4 in.	10B:C	817	860
DC5	5½ lbs.	9½ lbs.	4¼ in.	15¼ in.	7¼ in.	40B:C	16591	B-2, 818, 821, 862
DC6	6 lbs.	13 lbs.	5 in.	16¼ in.	8½ in.	40B:C	546	808, 862
DC10	10 lbs.	18 lbs.	5 in.	20 in.	7-3/4 in.	60B:C	546	B-2, 846, 862
DC20	20 lbs.	38 lbs.	7 in.	23¼ in.	10¼ in.	120B:C	577	864
HT2½	2½ lbs.	5¼ lbs.	3 in.	15½ in.	5½ in.	2B:C	817	860
HT5	5 lbs.	9½ lbs.	4¼ in.	15¼ in.	5-3/4 in.	5B:C	818	860
HT11	11 lbs.	22½ lbs.	6 in.	21 in.	9¼ in.	1A:10B:C	575	N/A
HT15½	15½ lbs.	27½ lbs.	6 in.	21 in.	9¼ in.	2A:10B:C	575	N/A

### STANDARD BRACKETS\*

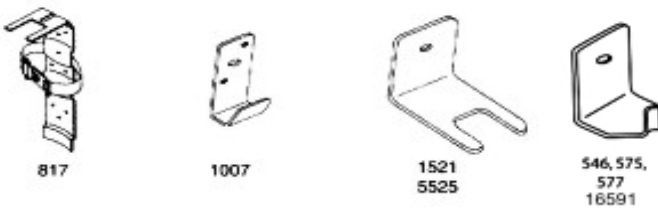

### OPTIONAL BRACKETS\*

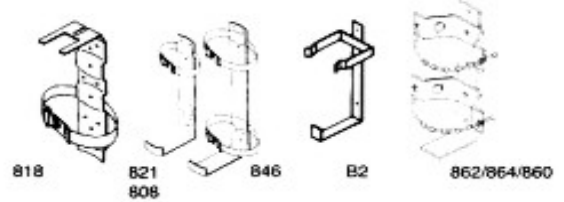

**\*NOTE:** Standard brackets are included with all extinguishers at no additional cost. If specified, optional brackets are only available at additional cost. All of the above brackets are designed to accommodate Larsen's extinguishers. While most comparably sized extinguishers usually will function with the above brackets, Larsen's cannot assume responsibility for variations in cylinder dimensions among various extinguisher suppliers.

**LARSEN'S MANUFACTURING COMPANY**  
 7421 Commerce Lane N.E., Mpls, MN 55432  
 Phone: (763) 571-1181 FAX: (763) 571-6900  
[www.larsensmfg.com](http://www.larsensmfg.com)

**FLORIDA DIVISION:**  
 3130 N.W. 17<sup>th</sup> Street, Ft. Lauderdale, FL 33311  
 Phone: (954) 486-3325 FAX: (954) 486-3352