


L-APC SERIES

RECESSED ACCESS PANEL FOR PLASTER SURFACES

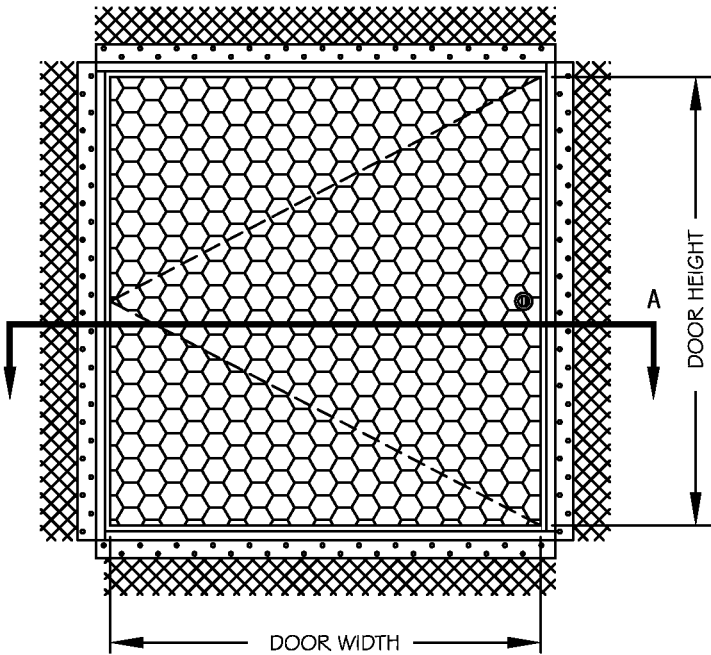


FRONT ELEVATION
NOT TO SCALE

SPECIFICATIONS

- 16 GAUGE (1.520mm) COLD ROLLED STEEL FRAME
- 16 GAUGE (1.520mm) COLD ROLLED STEEL DOOR
- SELF-FURRING 3.4 lb. GALVANIZED STEEL LATH WELDED TO DOOR
- BAKED ON POWDER COAT FINISH
- 22 GAUGE GALVANIZED STEEL PLASTER BEAD WITH EXPANDED LATH *SEE NOTATION BELOW
- CONCEALED PIVOT ROD HINGE
- SCREWDRIVER OPERATED CAM LATCH WITH STEEL GROMMET WELDED TO DOOR
- FRAMES ARE PROVIDED WITH .25" MOUNTING HOLES

OPTIONS

- GALVANIZED BONDERIZED STEEL
- KEY OPERATED CAM LOCK
- PREPARATION FOR 1.125" MORTISE CYLINDER (CYLINDER PROVIDED BY OTHERS OR BY LARSENS)

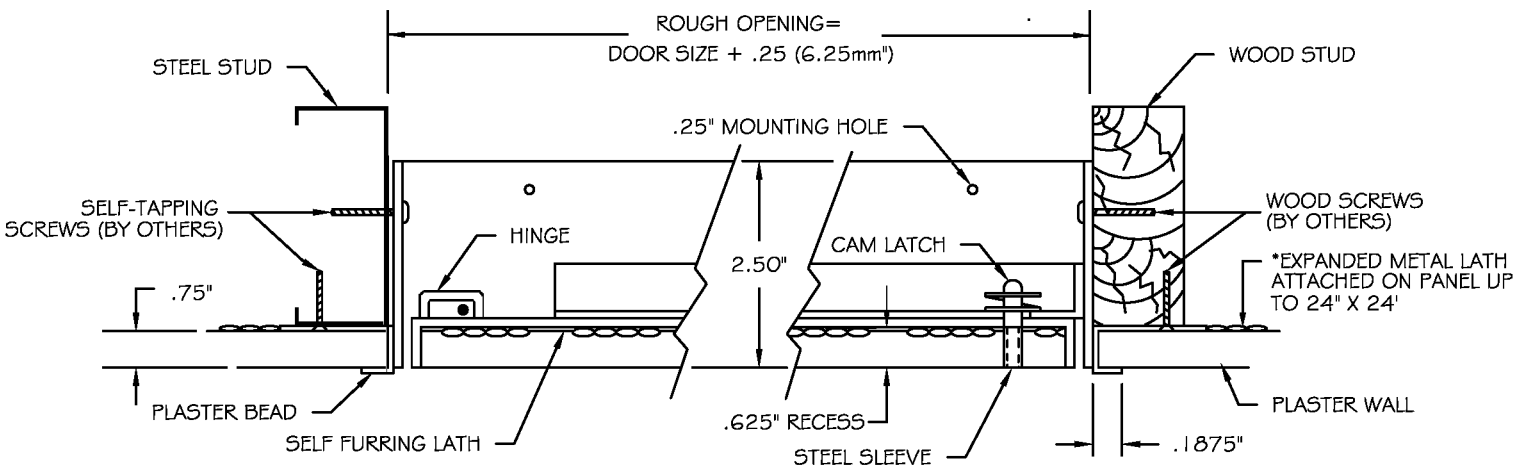

A CUT-THRU SECTION
A NOT TO SCALE

LARSEN'S MANUFACTURING CO.

7421 COMMERCE LANE
MINNEAPOLIS, MN 55432
PHONE: 800-527-7367
FAX: 763-571-6900

PROJECT:			
CONTRACTOR:			
DISTRIBUTOR:			
DRAWN BY: GML	DATE: 11-03-2006	QUANTITY:	TITLE: L-APC.DOC

L-APC SERIES

RECESSED ACCESS PANEL FOR PLASTER APPLICATIONS

Standard Features:

Door:	16 gauge (1.52 mm thick) cold rolled steel
Frame:	16 gauge (1.52 mm thick) cold rolled steel with 22 gauge galvanized plaster casing bead
Hinge:	Concealed pivoting rod hinge
Latch:	Screwdriver cam latch(es) Optional: key operated cam lock or special mortise cylinder preparation to accept 2" cylinder (cylinder provided by Larsens or others)
Finish:	Baked on powder coat finish
Pan:	5/8" pan for in-fill of material

Specifications:

Frame shall be 16 gauge cold rolled steel with 22 gauge galvanized plaster casing bead. Door shall be fabricated from 16 gauge cold rolled steel, recessed 5/8" for in-fill of material. Hinge shall be a concealed pivoting rod type. Latch(es) shall be a screwdriver operated cam type (optional: key operated cam lock or preparation to receive special 2" mortise cylinder – provided by Larsens or others). Finish shall be baked on powder coat.

Installation shall be in accordance with manufacturer's instructions. Manufacturer shall guarantee against defects in material and workmanship for a period of one year.

Standard Sizes:

Std sizes (in)	Std Sizes (mm)	Weight/Latches
08x08	152x152	7/1
12x12	254x254	8/1
12x24	305x610	11/2
16x16	406x406	11/1
18x18	457x457	13/2
22x30	559x762	25/2
24x24	610x610	22/2
24x36	610x914	32/3

All units are hinged on the second dimension (height). Rough opening is door size plus ¼".