


L-DPH SERIES

HIGH SECURITY NON-RATED ACCESS PANEL FOR ALL SURFACES

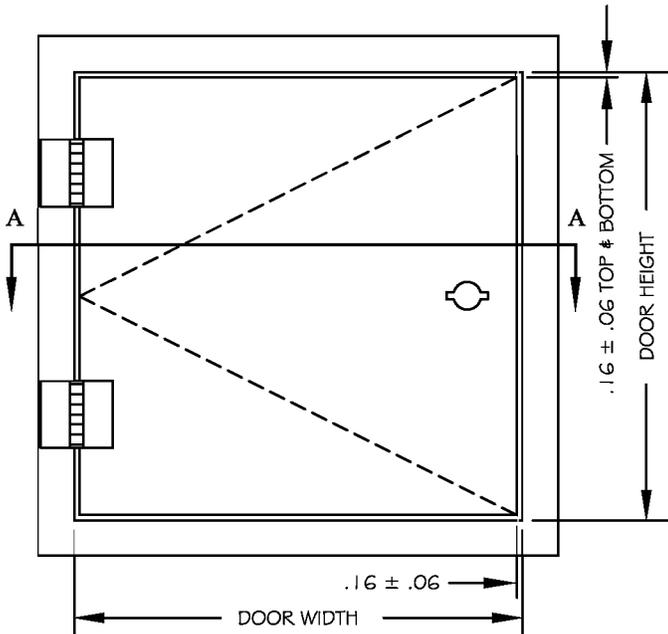


FRONT ELEVATION
NOT TO SCALE

SPECIFICATIONS

- 51mm x 51mm x 4.8mm (2" X 2" X 3/16") STEEL ANGLE FRAME
- 25mm x 25mm x 3.2mm (1" X 1" X 1/8") STEEL ANGLE DOOR STOP
- 10 GAUGE STEEL PLATE DOOR
- ALL EXPOSED JOINTS WELDED, FILLED AND GROUND SMOOTH
- BAKED ON POWDER COAT FINISH
- 102mm x 102mm (4" X 4") BUTT HINGE WELDED TO DOOR AND FRAME
- PINNED ALLEN HEAD SECURITY SCREWS (STANDARD ON PANELS 24 X 24 AND LARGER)

OPTIONS

- PREPARATION FOR 1.125" MORTISE CYLINDER (CYLINDER PROVIDED BY OTHERS OR BY LARSENS)
- PREPARATION FOR HEAVY DUTY DETENTION DEAD BOLT LOCK (LOCK PROVIDED BY OTHERS OR BY LARSENS)
- MASONRY ANCHORS ATTACHED

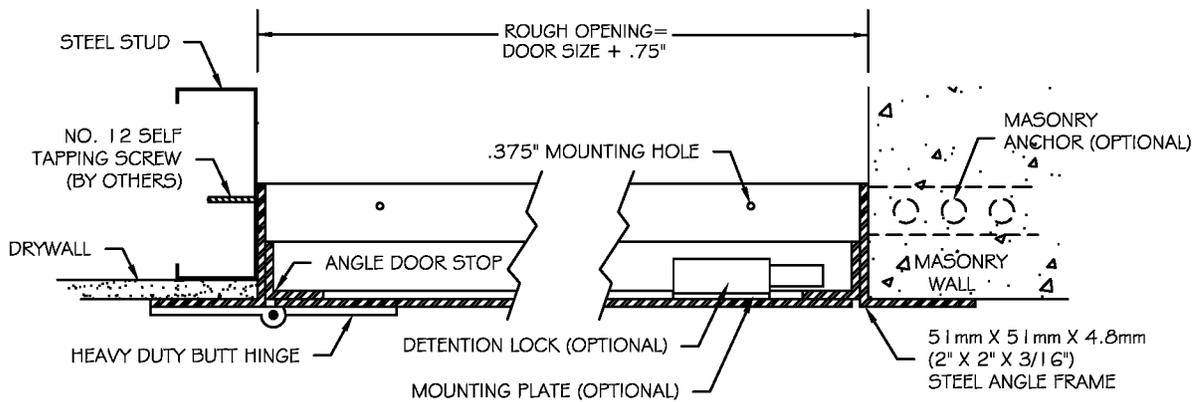

A
A CUT-THRU SECTION
NOT TO SCALE

LARSEN'S MANUFACTURING CO.

7421 COMMERCE LANE
MINNEAPOLIS, MN 55432
PHONE: 800-527-7367
FAX: 763-571-6900

PROJECT:			
CONTRACTOR:			
DISTRIBUTOR:			
DRAWN BY: GML	DATE: 11-03-2006	QUANTITY:	TITLE: L-DPH.DOC

L-DPH SERIES

HIGH SECURITY ACCESS PANEL FOR ALL-PURPOSE APPLICATIONS

Standard Features:

Door:	10 gauge (3.43 mm thick) cold rolled steel
Frame:	2" x 2" x 3/16" (50.8mm x 50.8mm x 4.76mm) steel angle
Hinge:	Heavy duty butt hinges Optional: Continuous piano hinge
Latch:	Pinned allen head security screw(s) Optional: mortise cylinder preparation (cylinder provided by Larsens or others) or heavy duty detention lock preparation (deadbolt lock provided by Larsens or others)
Finish:	Baked on powder coat finish

Specifications:

Frame shall be 2" x 2" x 3/16" (50.8mm x 50.8mm x 4.76mm) steel angle. Door shall be fabricated from 10 gauge (3.43 mm thick) cold rolled steel. Hinges shall be heavy duty butt type hinges (optional: continuous piano type). Latch(es) shall be pinned allen head security screw(s) (optional: prepared to receive 1-1/8" mortise cylinder – cylinder provided by Larsens or others; or detention preparation to receive heavy duty deadbolt lock – deadbolt lock provided by Larsens or others). Finish shall be baked on powder coat.

Installation shall be in accordance with manufacturer's instructions. Manufacturer shall guarantee against defects in material and workmanship for a period of one year.

Standard Sizes:

Std sizes (in)	Std Sizes (mm)	Weight/Latches
12x12	305x305	35/1
16x16	406x406	44/1
18x18	457x457	49/1
22x30	559x762	69/2
24x24	610x610	65/2
24x36	610x914	80/3
24x40	610x1016	120/4
24x48	610x1219	125/4
36x36	914x914	130/5

All units are hinged on the second dimension (height). Rough opening is door size plus 3/4".