

L-WSR Series**Weather Strip Removable Access Doors**

Weather Strip Removable Access Doors are designed with flush gaskets between the panel and frame to ensure flush air seal in all types of walls and ceilings. *Note: Door has **NOT** been tested for air tightness.*

Door and Frame shall be 16 gauge galvanized steel with a white prime coat finish.

Frame is a one piece construction 1" wide and produces perfect concealment of the rough wall openings. Wall frame is provided with 1/4" mounting holes for fastening within the furred spaces allowing faster installation and giving maximum clearance.

Door is fully removable and held in place by multiple latches.

Latch is a screwdriver operated.

Finish is a white prime coat suitable for painting.

Guide Specification

Provide Larsen's[®] L-WSR series, Weather Strip Removable access door (specify model number and options). Access door and frame shall be gasketed between the panel and frame to ensure flush air seal in all types of walls and ceilings. Access door and frame shall be fabricated from 16 gauge, galvanized steel with a white prime coat finish. The door shall have rounded safety corners. Frame shall be one piece construction with no miters or welds on the face. Latches shall be screwdriver operated. Finish shall be a white prime coat suitable for painting.



MODEL NUMBER AND OPTIONS SELECTION

BASE MODEL NUMBER

- L-WSR Weather Strip Removable Access Door


Suffix Options

- AKL Allen Key Latch
 -CL Cylinder Lock (one per door)
 -CLD Cylinder Lock with Dust Shutter (one per door)
 -SS Stainless Steel Construction (Type 304 No. 4 Satin Finish)
 -TH 'T' Handle

STANDARD AVAILABLE SIZES

Special sizes available upon request.

NOMINAL DOOR SIZE (W x H)	WALL OPENING	LATCHES	WEIGHT
L-WSR 8" x 8"	8-1/2" x 8-1/2"	4	3.0 lbs.
L-WSR 10" x 10"	10-1/2" x 10-1/2"	4	4.0 lbs.
L-WSR 12" x 12"	12-1/2" x 12-1/2"	4	5.5 lbs.
L-WSR 14" x 14"	14-1/2" x 14-1/2"	4	6.0 lbs.
L-WSR 16" x 16"	16-1/2" x 16-1/2"	4	7.5 lbs.
L-WSR 18" x 18"	18-1/2" x 18-1/2"	6	9.0 lbs.
L-WSR 24" x 24"	24-1/2" x 24-1/2"	8	15.0 lbs.

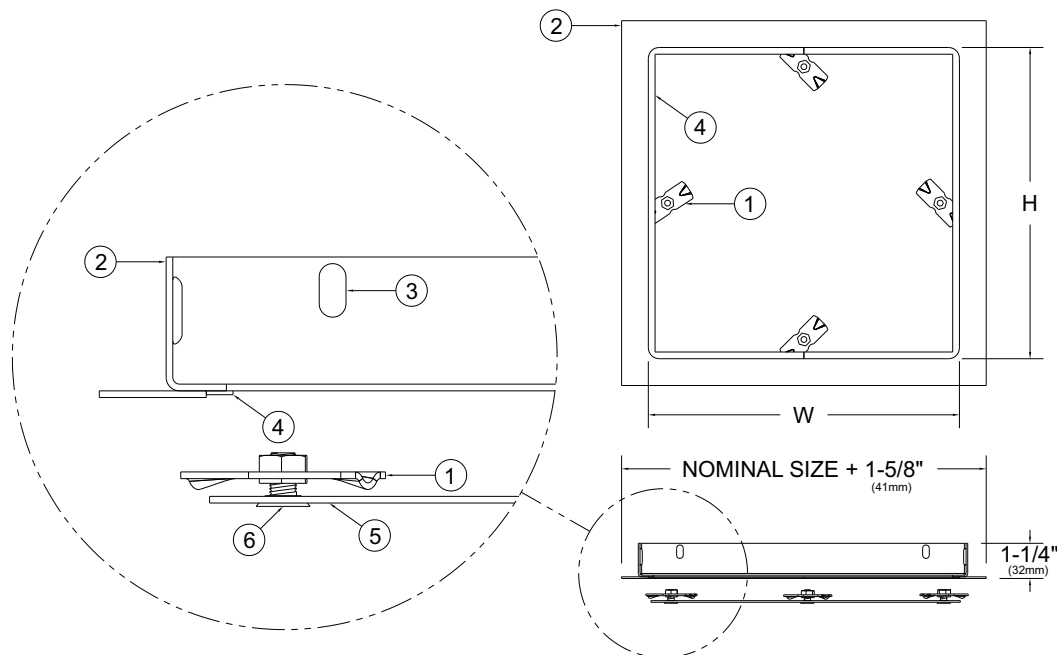

- | | |
|------------------------|----------------------------|
| 1. LATCH ASSEMBLY | 4. WEATHER STRIP GASKET |
| 2. FRAME | 5. 16 GAUGE DOOR PANEL |
| 3. FRAME MOUNTING HOLE | 6. SLOTTED FLAT HEAD SCREW |

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Call Larsen's Manufacturing Co. for current listings and approvals. Dimensions are subject to manufacturer's tolerance and may change without notice. Larsen's assumes no responsibility for use of void or superceded data. © Copyright Larsen's Manufacturing Co.®, Member of Morris Group International® Please visit www.larsensmfg.com for most current specifications.

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options _____	Quantity _____
Company _____	Date _____
Contact _____	Title _____
Approval for Manufacturing/Signature _____	

L-WSR

Revised: 04/15/2019